


VYPR 2 Series

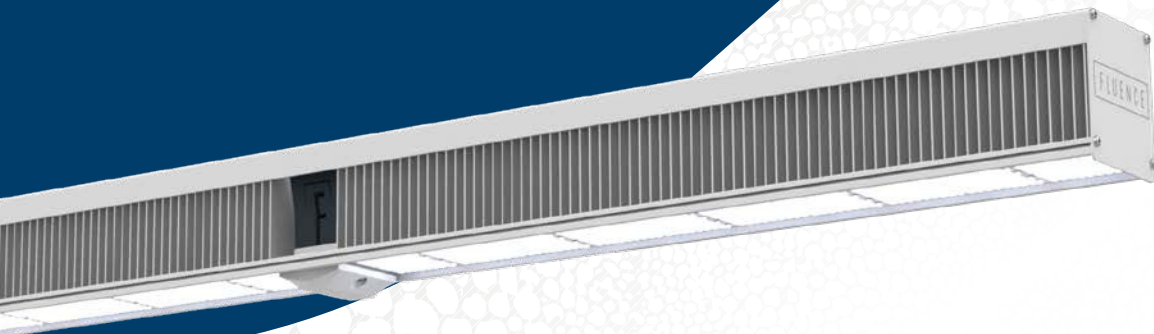

VYPR 2x
VYPR 2p

USER MANUAL

IMPORTANT SAFETY PRECAUTIONS	2
CULTIVATION BEST PRACTICES	2
GENERAL CARE	2
SYSTEM HARDWARE & ACCESSORIES	3
ASSEMBLY INSTRUCTIONS	4
TECHNICAL SPECIFICATIONS	6
CAUTIONS & WARNINGS	8
PRODUCT GUARANTEE & WARRANTY	12

IMPORTANT SAFETY PRECAUTIONS

- The system should only be cleaned as directed in the Fluence's Fixture Cleaning Recommendations which can be downloaded from the Fluence Support Center <https://fluence-led.com/support-center/>.
- You should seek service for your system by qualified service personnel if any of the following occur:
 1. The power-supply cord or the plug has been damaged.
 2. The unit has been exposed to rain.
 3. The unit exhibits a marked change in performance.
 4. The unit has been dropped, or its enclosure or chassis is damaged.

CULTIVATION BEST PRACTICES

Fluence encourages everyone to experiment and pursue their own techniques. Every crop is different and everyone has different goals. However, our internal research has given us insight into several strategies we would like to share.

- Regularly check your plants' growth and health. Fluence lighting systems deliver high levels of PAR, typically more than experienced in nature. Adjustments to H₂O, CO₂, RH, nutrients, and temperature are typically required.
- Mount the fixture at least 18" from the top of your canopy to ensure optimal uniformity and consistent PPFD. The VYPR Series was designed to provide uniform light dispersion and requires precise deployment. A 1" variation in either direction will have a significant change in uniformity and PPFD (which may or may not be desired).
- Many plants prefer higher temperatures when exposed to high PPFD. Experiment with higher temperatures to achieve higher yields. Canopy temperature and room ambient temperature often vary. For accurate results, test at the canopy level to gauge leaf surface temperature.
- Fluence recommends the use of AC circuit contactors to completely disconnect the facility AC voltage from the luminaire to mitigate potential glowing or dimming interruptions of the crop dark period. For more

information, please download the Dim-to-Off Application Note available at the Fluence Support Center <https://fluence-led.com/support-center/>.

For cultivation recommendations visit <https://fluence-led.com/science-articles/>.

GENERAL CARE

VYPR Series systems is passively cooled with zero moving components. They are designed for accepted horticulture environments and years of maintenance-free performance. Some basic care will keep your system operating at peak performance cycle-after-cycle.

- Natural convection removes heat away from the heatsink. In order for the system to properly cool itself, at least one inch of space is required between the console and the roof of your grow area. Failure to do so may shorten the fixture's lifespan.
- To achieve the optimal lifespan and performance of your fixtures, routinely check for and remove excess dust, debris, and mineral build up from heatsink and LED array. Cleaning should always be done with the fixture unplugged from its power source using low-pressure compressed air or water to rinse away dirt from light bars.
- Never use a cloth to clean the diode array. Doing so can scratch or compromise the integrity of the silicon seal, or dislodge diodes entirely.
- To limit degradation, avoid touching the diodes with your hands, even in a powered off state.

For detailed instructions for maintenance and cleaning, please visit <https://fluence-led.com/support-center/>.

VYPR 2x and VYPR 2p are high-performance lighting systems. Do not touch while in operation.

Please recycle all packaging material.


SYSTEM HARDWARE & ACCESSORIES

SYSTEM HARDWARE

- A** VYPR 2x or VYPR 2p fixture
- B** Power Supply pre-configured with Male AC connector, Female DC connector, and Male Dimming connector (dimming sold separately)

ACCESSORIES

- C** AC & DC Cables
 - C1** (1) AC Cable, 6' (1.83m) or 15' (4.57m)
 - C2** (1) DC Cable, 3' (0.91m) or 6' (1.83m)
 - C3** (1) Pigtail Dimming Adapter (purple/grey leads)
- D** Mounting Hardware (depending on your selection at the time of purchase)
 - D1** Pipe Bracket
 - D2** Unistrut Bracket
 - D3** Square Bracket
- E** (1) Vinyl Fluence Sticker

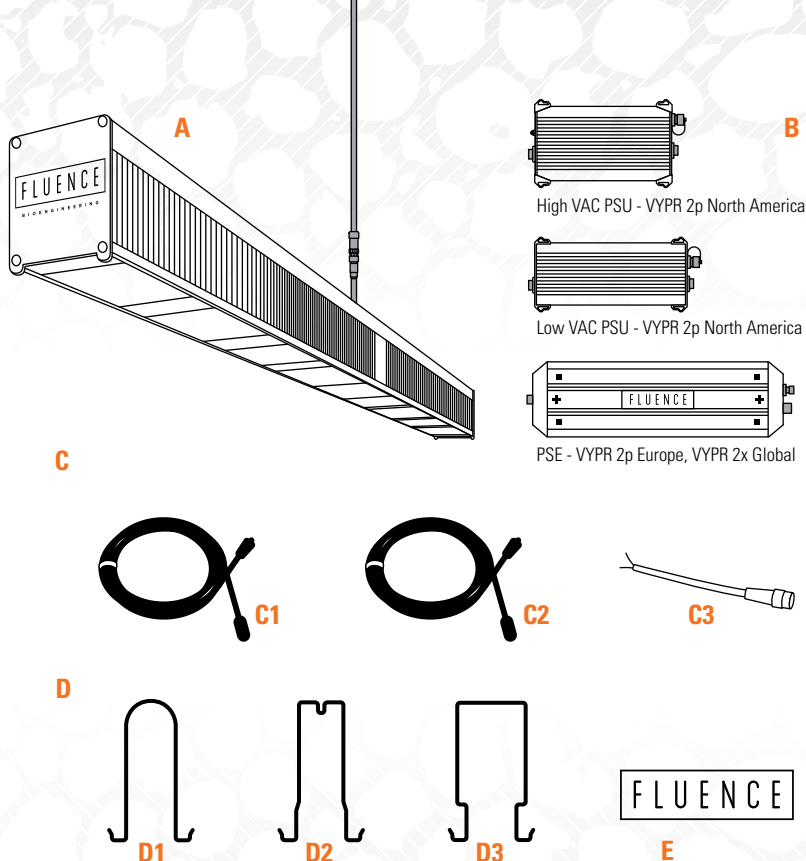


ASSEMBLY INSTRUCTIONS

- 1 Unbox fixture and place on flush, stable surface. Keep the VYPR Series protective cover on the fixture during installation to protect LED array.
- 2 To mount fixture, follow the steps in the installation guide sheet included in the box. Hang the fixture in the desired location and adjust the mounting height to at least 18" above the plant canopy.
- 3 Mount the power supply per installation guide.
- 4 Connect the VYPR fixture to power supply with 3' or 6' DC cable.

CAUTION: To protect the LED ARRAY,


- Do NOT remove the protective cover during installation.
- Do NOT contact the LED array or protective cover with sharp object or force that may damage the LED's.
- Do NOT leave the protective cover on the fixture after installation. It will melt when powering the fixture.
- Do NOT plug in AC power BEFORE connecting the power supply to VYPR fixture first.

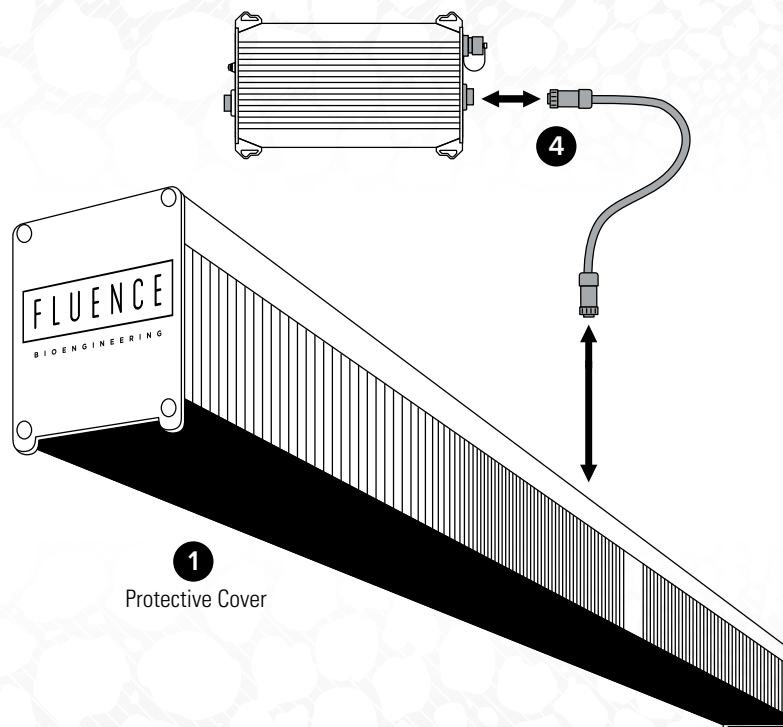

5 Remove the protective cover to expose the LED array.

6 Plug in AC power to turn on the VYPR fixture.

7 Optional: if connecting to a dimmer system or controller, remove dust cap on the power supply, connect to the included pigtail dimming adapter or 3-pin waterproof dimming connector.

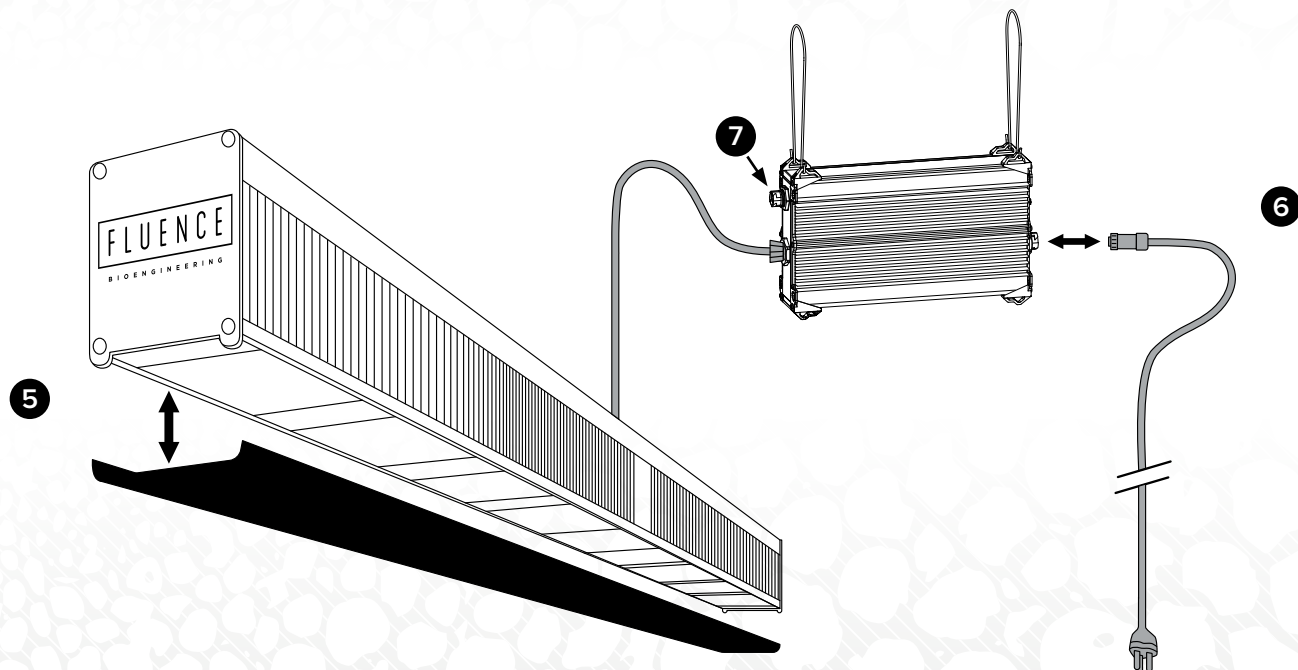

TECHNICAL SPECIFICATIONS

STOCK KEEPING UNIT (SKU) CONFIGURATOR & OPTIONS


Family	Model	Spectrum	Input Voltage	AC Power Cord	AC Plug	DC Cord Length	Mounting Hardware	Packaging
VR	VYPR	2x X	I PhysioSpec Indoor	1 120-277V	06 6.0' (1.83m)	N5P NEMA 5–15P	3 3' (.91m)	S Square Bracket
		2p Plus	G PhysioSpec Greenhouse	2 120-277 (PSE only)	15 15.0' (4.57m)	N6P NEMA 6–15P	06 6' (1.83m)	U Unistrut Bracket
				3 347V (PSE only)		L7P NEMA L7–15P		P Pipe Bracket
				4 400V (PSE only)		TFP Schuko Type F		
				5 480V (PSE only)		PTP Pigtails		
				6 347-480V		VPP VDE Pigtail		

Model	Input Power	Amps@120V	Amps@208V	Amps@240V	Amps@277V	Amps@347V	Amps@400V	Amps@480V	Frequency
VYPR 2x	346W	2.85	1.64	1.43	1.23	1.02	0.88	0.73	50/60Hz
VYPR 2p	630W	5.26	3.03	2.63	2.28	1.87	1.62	1.35	50/60Hz


Power Supply Specifications

Max. Ambient Temperature		Photosynthetic Photon Flux (PPF) ¹		Light Fixture	Power Supply Type	AC Input	Region
VYPR 2x	95°F / 35°C	VYPR 2x	900 µmol/s	VYPR 2p (630W)	PSU - High VAC	347-480V, 630W	North America
VYPR 2p	95°F / 35°C	VYPR 2p	1700 µmol/s		PSU - Low VAC	120-277V, 630W	North America
Energy Efficiency (PAR)/Watt)					PSE - Low VAC	120-277V or 347-480V	Europe
					PSE - High VAC	630W	
VYPR 2x	2.60 µmol/J			VYPR 2x (346W)	PSE - Low VAC	120-277V or 347-480V	Global
VYPR 2p	2.70 µmol/J				PSE - High VAC	630W	


PSE

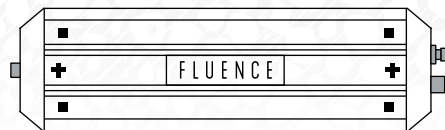

PSU - HV



PSU - LV



VYPR 2x



VYPR 2p



Dimensions and Weight

VYPR 2x

24.1" L x 2.9" W x 3.3" H | 4lbs 15oz
61.2cm L x 7.4cm W x 8.3cm H | 2.2kg

VYPR 2p

46.1" L x 2.9" W x 3.3" H | 9lbs 4oz
117.2cm L x 7.4cm W x 8.3cm H | 4.2kg

PSU - High VAC

11.47" L x 6.41" W x 2.47" H | 7.5lbs
29.1cm L x 16.3cm W x 6.3cm H | 3.4kg

PSU - Low VAC

13.02" L x 5.26" W x 2.56" H | 7.5lbs
33.1cm L x 13.4cm W x 6.5cm H | 3.4kg

PSE-342W

22" L x 6.2" W x 2.9" H | 9lbs
55.9cm L x 15.8cm W x 7.3cm H | 4.1kg

PSE-631W

22" L x 6.2" W x 2.9" H | 12lbs
55.9cm L x 15.8cm W x 7.3cm H | 5.4kg

CAUTIONS & WARNINGS

WARNING

Turn off and disconnect the power before installation. Installation should be performed by a qualified electrician in accordance with all national and local electrical and construction codes and regulations.

- DO NOT attempt to install or use this product until you have fully read and understand the installation instructions contained in this user and installation guide and on the product safety labels. Failure to follow the Fluence product instructions and safety label advice may result in damage to the product, damage to property, or personal injury. Be sure to retain a copy of this user guide after installation for future reference.
- Risk of Electrical Shock. Turn off and disconnect the power before installing, moving, or cleaning to reduce the possibility of serious injury. DO NOT disconnect cables from the power supply or LED light bar while energized.
- Only connect the system to an electrical outlet or circuit of appropriate type and rating for the cord and plug. Connect the system only to power sources of the correct voltages and frequencies listed in the product specifications.
- Protect power cables from being pinched, walked on, or otherwise damaged.
- Use a strain-relief or power cord grip if needed. Maintain a minimum of 1" (2.5 cm) bend radius for all cables.
- Use IP wet-rated junction boxes and fittings for the power cords equal to the IP rating of the rating of the lighting system for the application.
- DO NOT connect to live power until installation is complete and all connections are made.
- DO NOT modify or alter the product; doing so will void the warranty. Please refer to the Fluence Terms and Conditions and Limited Warranty for further details.
- LED and heatsink surfaces may be hot. DO NOT touch while in operation. Allow sufficient cooling time before handling.
- To reduce the risk of overheating or fire, never place operating fixtures face down on a flush surface. Always allow for adequate ventilation of fixtures and power supplies.

CAUTIONS & WARNINGS

CHEMICAL EXPOSURE PRECAUTION

Fluence lighting systems are designed to be resilient against crop protection products. Many chemicals used in the Commercial Horticultural Industry are corrosive to electronic equipment. If the luminaire is accidentally exposed to a corrosive liquid or vapor (e.g. VOC –Volatile Organic Compound and H₂S – Hydrogen Sulfide) the luminaire must be rinsed with clean water as soon as possible. The product warranty will no longer apply if the product is exposed or remains in the corrosive environment. It is recommended the luminaires be removed and protected from the corrosive environment during all periods of disinfection or sanitization of the facility.

CALIFORNIA PROPOSITION 65 WARNING

WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. For more information: www.P65Warnings.ca.gov.

PHOTOBIOLOGICAL HAZARD

To prevent eye damage, avoid looking directly at the unshielded LEDs. Practice safety precautions recommended by (IEC 62471 and IEC TR 62778) for photobiological Risk Group 1.



ETL Rating: VYPR Series fixtures are rated suitable for wet locations. A “wet location” is defined as an interior or exterior location in which water or other liquids may drip, splash or flow on or against the electrical components of a lighting fixture. VYPR Series fixtures and power supply are certified to meet UL standards (ETL) from the Intertek safety consulting and certification company. Systems are cETL listed and are rated IP66 by IEC standard 60529.

The light source of this luminaire is not replaceable; when the light source reached its end of life the whole luminaire shall be replaced.

Horticulture Lighting, not suitable for household room illumination.

1 PPF calculations compiled using integrating sphere measurements and typical spectroradiometric data for each LED to determine typical fixture performance. Actual photometric results may vary within the LED manufacturer's bin tolerance.

2 Wattage values are typical expected values. Fluence maintains a tolerance of $\pm 10\%$ on flux and power specifications. Target light levels can vary from projected levels depending on ambient temperature, room reflections values and dirt accumulation.

Importer:

Signify Netherlands B.V.
Flight Forum 2000
5657 EX Eindhoven
The Netherlands



D Produkt zur Raumbelichtung

im Haushalt nicht geeignet GB Product not suitable for domestic household lighting F Produit inadapté a l'éclairage intérieur d'une habitation I Prodotto non idoneo a impianti di illuminazione domestici E Producto not adecuado para iluminacion residencial P Produto nao adequado para iluminacao domestica GR Το προϊόν δεν είναι κατάλληλο για φωτισμό οικιακής χρήσης NL Product niet geschikt voor huishoudelijke verlichtingsdoeleinden S Produkten ar ej lamplig for hushallsbelysning FIN Tuotetta ei voida käyttää kotitalouksien valaisuksi N Produktet er ikke egnet til a lyse opp rom med DK Produktet er ikke egnet husholdningsbelysning CZ Vyrobek není vhodný pro osvětlení domácnosti RUС Продукт не подходит для бытового освещения помещений KZ Бул өнім үйдегі тұрмыстық жарықтандыруға жарамайды H A termék nem alkalmas háztartási világításnak PL Produkt nie jest odpowiedni do oświetlenia domowego SK Produkt nie je vhodný na osvetlenie miestnosti v domácnosti SLO Izdelek ni primeren za osvetlitev bivalnih prostorov TR Urun, ev aydınlatması için uygun değildir HR Proizvod nije prikladan za rasvjetu prostorija u kućanstvu RO Produsul nu este adecvat pentru iluminatul locuinței BG Продуктът не е подходящ за жилищно-битово осветление EST Toode ei sobi majapidamisvalgustus LT Prietaisais neskirtas namų apšvietimui LV Produkts nav

piemērots apgaismojumam mājās. SRB Proizvod nije pogodan za rasvetu u domaćinstvu UA Продукт не підходить для побутового освітлення приміщень



D WEEE-Geratekennzeichen:

Nicht in den Hausmüll werfen! Sachgerechte Entsorgung der Produkte und Verpackung nach geltendem Landesrecht vornehmen. GB WEEE device identification: Do not dispose of in domestic waste! Proper disposal of the product and packaging must be done in accordance with the applicable national law. F Identification WEEE du dispositif : ne pas jeter avec les déchets ménagers ! Le produit et son emballage doivent être éliminés conformément à la législation nationale en vigueur. I Identificazione RAEE del dispositivo: Non smaltire con i rifiuti domestici! Lo smaltimento corretto del prodotto e dell'imballaggio deve essere effettuato secondo la legge nazionale applicabile. E Identificación RAEE del dispositivo: No desechar con los residuos domésticos. El desecho adecuado del producto y el embalaje deberá llevarse a cabo de conformidad con la ley nacional aplicable. P Identificação do dispositivo REEE: Não deite fora no lixo doméstico! A eliminação adequada do produto e da embalagem deve ser feita em conformidade com a legislação nacional aplicável. GR Ανεγνώριση συσκευής WEEE: Μην απορρίπτετε με τα οικιακά απορρίμματα! Η απόρριψη του προϊόντος και της συσκευασίας πρέπει να γίνει με σύμφωνα με την ισχύουσα εθνική νομοθεσία. NL WEE-apparaatidentificatie: niet weggoien bij het huishoudelijke afval! Correcte verwijdering van het product en verpakking dient te gebeuren overeenkomstig de toepasselijke nationale wetgeving. S Enhetsens identifikation for WEEE: Slang inte bland hushallssoor! Produkten och förpackningen

maste slangas pa ett korrekt sätt i enlighet med gällande nationell lag. FIN WEEE-laitetunnus: Ala havita kotitalousjätteen seassa! Tuotteen ja pakkauksen asianmukainen hävittäminen on suoritettava soveltuvien paikallisten lakien mukaisesti. N WEEE Enhetsidentifikasjon: Skal ikke kastes i husholdningsavfallet! Riktig avhending av produktet og emballasjen må gjøres i henhold til gjeldende nasjonale lover. DK WEEE enhetsidentifikation: Ma ikke bortskaffelse med husholdningsaffald! Korrekt bortskaffelse af produktet og emballagen skal ske i overensstemmelse med g.l.dende national lovgivning. CZ Označení zařízení podle systému WEEE: Nevyhazovat do domovního odpadu! Správná likvidace výrobku a obalu musí být provedena v souladu s platnými národními legislativními předpisy. RUС Идентификация устройства в соответствии с Директивой ЕС (WEEE) об отходах электрического и электронного оборудования: Не выбрасывайте продукт вместе с бытовыми отходами! Продукт и упаковку необходимо утилизировать надлежащим образом в соответствии с действующим национальным законодательством. KZ WEEE қурылғы идентификаторы: үй қойысымен бірге тастамаңыз! Бул өнім мен оның қаптамасының тасталуы қолданыстағы ұлттық заңға сай дұрыс орындалуы тиіс. H WEEE kезsulek azonosito: Kommunális hulladekba helyezni tilos! A termék es a csomagolás megfelelő ártalmatlanítását a hatályos nemzeti szabályozás szerint kell elvégezni. PL Identyfikacja urządzenia WEEE: Urządzenia nie wolno wyrzucać wraz ze zwykłymi odpadami domowymi! Właściwe usuwanie produktu i opakowania musi odbywać się zgodnie z obowiązującym prawem krajowym. SK Označenie zariadenia WEEE: Nelikvidujte v rámci komunálneho odpadu! Riadna likvidácia tohto produktu a obalu sa musí vykonať v súlade s národnými právnymi predpismi. SLO Identifikacija izdelka v smislu OEEO: Ne zavržite med gospodinjnske odpadke! Izdelek in embalažo je treba med odpadke zavržiti ustrezno in v skladu z veljavno nacionalno zakonodajo. TR WEEE cihaz kimliği: Evsel atıkları dahil etmeyin! Urun ve ambalajın

doğru biçimde imhası ilgili ulusal yasaya uygun olarak gerçekleştirilmelidir. HR Oznaka WEEE na uređaju: ne odlažite u kućni otpad! Proizvod i pakiranje potrebno je ispravno odložiti u skladu s primjenjivim zakonom države. RO Identificarea dispozitivelor WEEE: Nu eliminați produsul în gunoii menajeri! Eliminarea corectă a produsului și ambalarea se vor face în conformitate cu legea națională aplicabilă. BG Идентификация на устройството по WEEE: Да не се изхвърля с битовите отпадъци! Правилното третиране на продукта и опаковката му като отпадъци трябва да става в съответствие с приложимото национално законодателство. EST WEEE-seadme identifitseerimine: Arge visake olmejaatmetesse! Toote ja pakendite nouetekohane korvaldamine peab toimuma kooskõlas kehtivate siseriiklike oiguskatidega. LT WEEE įrenginio identifikacija: nešalinti kartu su buitinėmis atliekomis! Gaminio ir pakuotės šalinimas turi būti atliekamas pagal šalies galiojančius įstatymus. LV WEEE ierices identifikācija: neizmest sadzīves atkritumos! Produkts un iepakojums jāizmet atbilstoši piemērojamam valsts likumam. SRB Identifikacija WEEE uređaja: Nemojte da odlažete u otpad iz domaćinstva! Proizvod i pakovanje morate da odložite u otpad u skladu sa važećim nacionalnim zakonom. UA Ідентифікація пристрою відповідно до Директиви ЄС (WEEE) щодо відпрацьованого електричного й електронного обладнання: Не викидайте продукт разом з іншим домашнім сміттям! Продукт та упаковку слід утилізувати належним чином відповідно до діючого національного законодавства.



D Produkt, bei der der Schutz gegen elektrischen Schlag auf der Anwendung der Schutzkreisspannung (SELV) beruht und in der Spannung höher als SELV nicht erzeugt werden. GB The product protects against risk of electric shock with safety extra-low voltage

(SELV), not exceeding voltages above SELV. F Le produit protege des risques d'electrocution grace a la tres basse tension de securite (TBTS) ; il ne presente pas de tension superieure a la TBTS. I Il prodotto protegge dal rischio di scossa elettrica grazie al sistema a bassissima tensione (SELV) che non supera le tensioni SELV. E El producto protege contra riesgo de descarga electrica con voltaje bajo extra seguro (SELV) que no exceda los voltajes superiores a SELV. P O produto protege contra o risco de choque electrico com o tensao de segurancia muito baixa (SELV), nao excedendo as tensoes acima de SELV. GR To πρoϊόν προσφέρει προστασία από ηλεκτροπληξία λόγω της εξαιρετικά χαμηλής τάσης (SELV). To πρoϊόν δεν υπερβαίνει τις τάσεις πάνω από το επίπεδο SELV. NL Dit product beschermt tegen het risico op elektrische schokken met extra lage veiligheids spanning (SELV); de SELV wordt niet overschreden. S Produktten skyddar mot risken for elektrisk chock med extra lag sakerhetsspanning (SELV) som inte overstiger spanning over SELV. FIN Tuote on suojattu sähköiskua vastaan erityisen alhaisen suojajännitteen (SELV) ansiosta, jännitteet eivät ylitä SELV-jännitettä. N Produktet beskytter mot risikoen for elektrisk stot med ekstrapolert lavspenning (SELV), som ikke overstiger spenninger over SELV. DK Produktet beskytter mod risiko for elektrisk stød med sikkerheds – ekstra-lavsp.ning (SELV, safety extra-low voltage), der ikke overstiger sp.ndinger over SELV. CZ Vyrobek chrani pred uzasem elektrickým proudem vzhledem k extra-nizkému napětí (SELV), nevyskytují se zde napětí nad SELV. RUS Продукт предотвращает риск поражения электрическим током благодаря работе при безопасном сверхнизком напряжении (БСНН). Напряжение не превышает БСНН. KZ Бұл өнім қауіпсіз өте төменгі кернеу (SELV) мөлшерінен жоғары кернеуден аспайтын қауіпсіз өте төменгі кернеудің арқасында электр тогына тусу қауіпінен қорғалған. H A termék biztonságos torpézfeszultség (SELV) alkalmazásával ved az elektromos áramutest veszélyeile szemben, a SELV értéket nem haladja meg a feszultség.

PL Produkt chroni przed porażeniem prądem elektrycznym dzięki obwodowi bardzo niskiego napięcia (SELV), nie przekraczającemu napięcia powyżej SELV. SK Produkt chrani pred zasiahnutim elektrickým prúdom použitím ochranného nízkeho napätia (SELV), nedosahuje sa napätie prekračujúce SELV. SLO Izdelek varuje pred električnim udarom zaradi varnostne male napetosti (SELV) in ne presega napetosti, višjih od SELV. TR Urun, SELV uzerindeki voltajlara cikmayan, guvenli cok dusuk gerilimle (SELV) elektrik şoku riskine karşı korur. HR Proizvod pruža zaštitu od električnog udara primjenom sigurnosnog malog napona (SELV). Ne generiraju se naponi koji premašuju SELV. RO Produsul protejează împotriva riscului de electrocutare cu tensiune de siguranță foarte joasă (SELV), fără să depășească tensiunile mai mari decât SELV. BG Продуктът осигурява защита от електрически удар с безопасна свръхниско напрежение (SELV), което не се повишава до стойности над SELV. EST Toode kaitseb elektriloogi ohu eest maandamata kaitsevaikepingse süsteemiga (SELV), mis ei ületa SELV-i korgemaid pingeid. LT Prietaisas apsaugo nuo elektros smūgio pavojaus, jei žema saugi įtampa (SELV) neviršija SELV įtampos. LV Produkts pasargā no elektrošoka riska, jo tam ir izteikti zema strāva (SELV), kas nepārsniedz strāvas līmeni virs SELV. SRB Proizvod štiti od rizika od električnog udara putem izuzetno niskog bezbednog napona (SELV), koji ne prekoračuje napone iznad SELV. UA Продукт захищає ризик ураження електричним струмом завдяки роботі при безпечній наднизькій напрузі (БННН). Напруга не перевищує БННН.



D CE-Kennzeichen: Hiermit erklärt Signify, dass dieses Produkt den grundlegenden Anforderungen und den relevanten Vorschriften der europäischen Richtlinien entspricht. GB CE marking: Signify declares

that this product conforms with the basic requirements and relevant provisions of the European guidelines. F Marquage CE: Signify declare que ce produit répond aux exigences de base et aux dispositions applicables des directives européennes. I Marchio CE: Signify dichiara che questo prodotto e conforme ai requisiti di base e i provvedimenti pertinenti secondo le linee guida europee. E Marca CE: Signify declara que este producto cumple con los requisitos basicos y las disposiciones relevantes de las directrices europeas. P Marca CE: A Signify declara que este produto esta em conformidade com os requisitos basicos e as disposicoes relevantes das diretrizes europeias. GR Σήμανση CE: Η Signify δηλώνει ότι το προϊόν αυτό συμμορφώνεται με τις βασικές απαιτήσεις και τις σχετικές διατάξεις των ευρωπαϊκών οδηγιών. NL CE-markering: Signify verklaart dat dit product voldoet aan de basisvereisten en relevante bepalingen van de Europese richtlijnen. S CE-marking: Signify tilkannager att den har produkten uppfyller de grundlaggande kraven och relevanta bestämmelserna i de europeiska riktlinjerna. FIN CE-merkintä: Signify takaa, etta tama tuote tayttaa Eurooppalaiset perusvaatimukset ja muut tarkeat vaatimukset. N CE-merking: Signify erkl.rer at dette produktet oppfyller krav og relevante bestemmelser i de europeiske retningslinjene. DK CE-m.rkning: Signify erkl.rer, at dette produkt overholder de grundlggende krav og relevante bestemmelser i de europ.iske vejledninger. CZ Značka CE: Společnost Signify prohlašuje, že tento výrobek splňuje základní požadavky a ustanovení evropských směrnic. RUS Маркировка CE: компания Signify заявляет, что данный продукт отвечает основным требованиям и соответствующим положениям Европейских директив. KZ CE bellicri: Signify kompaniasy bul 6nimni6 Europalıyq nusqaulyqtardıń neizgi talaptarı men qatysty erejelerine sıy ekenin jarıyaladı. H CE jeloles: Az Signify kijelenti, hogy a termék teljesíti az Európai irányelvek alapvető követelményeit és vonatkozó előírásait. PL Oznakowanie CE: firma Signify oświadcza, że niniejszy produkt jest zgodny z podstawowymi wymogami i odpowied-

nimi postanowieniami wytycznych europejskich. SK Označenie CE: Spoločnosť Signify týmto deklaruje, že tento produkt vyhovuje základným požiadavkám a relevantným predpisom európskych smerníc. SLO Oznaka CE: Družba Signify izjavlja, da ta izdelek izpolnjuje osnovne zahteve in ustrežna določila evropskih smernic. TR CE işareti: Signify, bu urunun Avrupa kılavuz ilkelerinin ilgili hükümleri ve temel gerekliliklerini uygun oldugunu beyan eder. HR Oznaka CE: tvrtka Signify ovim izjavlju da je ovaj proizvod u skladu s osnovnim zahtjevima i relevantnim odredbama europskih direktiva. RO Marcaj CE: Signify declară că acest produs respectă cerințele de bază și prevederile relevante ale standardelor europene. BG Маркировка „CE”: Signify декларира, че този продукт съответства на основните изисквания и приложимите разпоредби на европейските насоки. EST CE-margis: Signify kinnitab, et antud toode vastab Euroopa suuniste pohinouetele ja asjakohastele satetele. LT CE ženkinimas: Signify pareiškia, kad šis prietaisas atitinka pagrindinius Europos gairių reikalavimus ir atitinkamas nuostatas. LV CE marķējums: Signify paziņo, ka šis produkts atbilst Eiropas vadlīniju pamata prasībām un saistītiem nosacījumiem. SRB CE označavanje: Signify izjavljuje da je ovaj proizvod u saglasnosti sa osnovnim zahtevima i važećim propisima evropskih smernica. UA Маркування CE: компанія Signify засвідчує,



Horticulture Use



OUR PRODUCT GUARANTEE & WARRANTY

Every VYPR 2 system is engineered and built by Fluence Bioengineering using state-of-the-art robotics and hand craftsmanship. All VYPR 2 systems are guaranteed against manufacturing defects for five years from date of purchase. Contact us at support@fluence-led.com for more warranty information.

We stand behind our research, we stand behind our technology and we stand behind our clients. <https://fluence-led.com/warranty/>



Review our products, share your grow and stay abreast of the latest Fluence news and product releases through the channels below:



www.fluence-led.com

© Copyright 2023. Fluence Bioengineering, Inc.
102023 • 71126E