



RAZR MODULAR

Systems Designed with 3 and 6-Bar Fixtures

Designed for high-performance vertical farms, Fluence's award winning RAZR Modular System illuminates your crops from propagation to harvest, yielding remarkable savings on energy and maintenance.

FLEXIBLE PERFORMANCE

Fluence's years of experience with vertical farm growers has proven BROAD R3a is the best spectrum for propagation and full-cycle cultivation of a multitude of leafy greens, microgreens, herbs and other vegetables. In addition to the BROAD R3a white spectrum, RAZR Modular systems are now available with BROAD R4, two different system lengths and an IP67 rated enclosed version for harsh environments.



RAZR Modular

Systems Designed with 3 and 6-Bar Fixtures



SYSTEM SPECIFICATION	
Mounting Height Above Canopy	>6" [15 cm]
Number of Fixtures/System (3-Bar 24W)	3, 4, 6, and 8
Number of Fixtures/System (6-Bar 50W)	1 and 2
AC Input Power	215-620 W @ 277 V AC
AC Input Voltage	120-277 V, 277-480 V AC, 50/60 Hz
Power Factor*	> 0.97 (16-24 bars) and >0.92 (8-12 bars)
Total Harmonic Distortion (THD)*	< 10% (16-24 bars) and <20% (8-12 bars)
Dimming	Source Signal Driver, 0/1-10 V, OFF/ 10-100%
Max. Ambient Temperature	104°F / 40°C (95°F / 35°C @ 120 V AC)
Driver Lifetime at 40°C Ambient	> 50,000 hrs
Warranty	5 Year Limited
IP Rating per IEC 60598-1	IP66
Certifications	cETLus UL 8800, CE, Wet Location, DLC
DLC Reported Application and Use case	Indoor (Non-stacked), Indoor (Stacked) Top light/Sole-Source

LIGHT BAR SPECIFICATION	
Light Output PPF (per bar)	63 μmol/s
Efficacy (Spectrum)	2.6 μmol/J
Nominal DC Wattage/Bar	24-50 W
Light Distribution (Beam Angle)	120° Lambertian
Thermal Management	Passive
Lifetime LED Q90 (L90B50)	> 50,000 hrs
Thermal Management	Passive
IP Rating IEC 60598-1	IP67

* @ 100% output. Contact Fluence for values over dimming range

Spectrum	Light Bar Output (μmol/s)	Efficacy (μmol/J)	SKU Abbreviation
BROAD R3a	64	2.5	RM-48-SL-BW3
BROAD R4	62	2.7	RM-48-SL-BW4

Disclaimer: Performance values are from representative tests performed in accordance industry standards listed. Actual application performance may vary due to component tolerances and installation, environmental, and field measurements conditions.



VERTICAL ARRAY LAYOUT



HORIZONTAL ARRAY LAYOUT

SYSTEM ORDERING GUIDE

System includes light bars, power supply, frames, and DC cables (Splitters and Manifolds). See Accessories for hangers.

FAMILY ¹	Light Bar Length ¹	LED Layout ¹	Spectra ¹	Number of Bars per Fixture	Connector Type	Number of Fixtures	Voltage	Packaging
RM RAZR Modular	44" 44"	SL Standard Uniform Enclosed	BW3 BROAD R3a	3 ² 3-Bar Fixture (24W)	A Right Angle	8 ² 8 Fixtures	LV 120-277V	S Single
	48" 48"	SL Standard Uniform Enclosed	BW3 BROAD R3a BW4 BROAD R4			4 ² 4 Fixtures		
						3 ² 3 Fixtures		
						2 ³ 2 Fixtures		
						1 ³ 1 Fixture		

- Product listed on DLC QPL as DC powered module RM-48-xx-xxx (example: RM-48-SL-BW4)
- Available only in 3-bar fixtures at 24 W per bar
- Available only in 6-Bar fixtures at 50 W per bar





Contact **FLUENCE**
support@fluence-led.com
www.fluence-led.com/products/razr-series

RAZR Modular

Systems Designed with 3 and 6-Bar Fixtures



SPECTRA

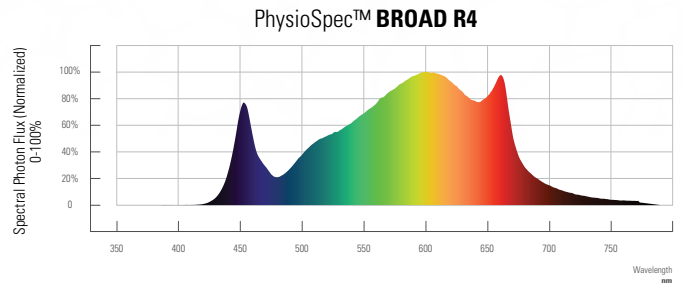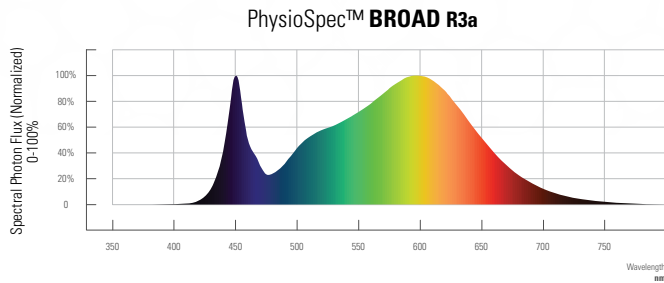

RAZR MODULAR SYSTEM SPECIFICATIONS

Fixture Type	Light Bar Spacing	Wattage/Bar	PPF per Fixture (400-700nm)	Number of Fixtures/System	System DC Power	System PPF (400-700nm)	AC Power (120-277V)	AC Current (120-277V)	AC Power (277-480V)	AC Current (277-480V)
3-Bar	8" [20 cm]	24 W	189 $\mu\text{mol/s}$	3 LB Frames	219 W DC	567 $\mu\text{mol/s}$	232-226 W	1.95-0.87 A	234-232 W	0.88-0.55 A
3-Bar	8" [20 cm]	24 W	189 $\mu\text{mol/s}$	4 LB Frames	292 W DC	756 $\mu\text{mol/s}$	309-302 W	2.60-1.12 A	310-306 W	1.15-0.68 A
3-Bar	8" [20 cm]	24 W	189 $\mu\text{mol/s}$	6 LB Frames	438 W DC	1134 $\mu\text{mol/s}$	451-446 W	3.75-1.58 A	443-442 W	1.60-0.90 A
3-Bar	8" [20 cm]	24 W	189 $\mu\text{mol/s}$	8 LB Frames	584 W DC	1512 $\mu\text{mol/s}$	603-595 W	5.02-2.11 A	592-590 W	2.14-1.20 A
6-Bar	8" [20 cm]	49 W	724 $\mu\text{mol/s}$	1 LB Frame	292 W DC	724 $\mu\text{mol/s}$	309-302 W	2.60-1.12 A	310-306 W	1.15-0.68 A
6-Bar	8" [20 cm]	49 W	724 $\mu\text{mol/s}$	2 LB Frames	584 W DC	1447 $\mu\text{mol/s}$	603-595 W	5.02-2.11 A	592-590 W	2.14-1.20 A

Disclaimer: Performance values are from representative tests performed in accordance industry standards listed. Actual application performance may vary due to component tolerances and installation, environmental, and field measurements conditions.

SYSTEM ORDERING PART NUMBERS (3-BAR 44")

Description	Regional Commercial Code	Ordering Part Number (12NC)
RAZRm, 44", Enclosed, 3-Bar/ 8 Fixtures, 120-277V, BW3, Right Angle Connector	RM-44SLBW3-3A8LV-S	9124 017 02277
RAZRm, 44", Enclosed, 3-Bar/6 Fixtures, 120-277V, BW3, Right Angle Connector	RM-44SLBW3-3A6LV-S	9124 017 02278
RAZRm, 44", Enclosed, 3-Bar/4 Fixtures, 120-277V, BW3, Right Angle Connector	RM-44SLBW3-3A4LV-S	9124 017 02279
RAZRm, 44", Enclosed, 3-Bar/3 Fixtures, 120-277V, BW3, Right Angle Connector	RM-44SLBW3-3A3LV-S	9124 017 02280
RAZRm, 44", Enclosed, 3-Bar/8 Fixtures, 277-480V, BW3, Right Angle Connector	RM-44SLBW3-3A8HV-S	9124 017 02281
RAZRm, 44", Enclosed, 3-Bar/6 Fixtures, 277-480V, BW3, Right Angle Connector	RM-44SLBW3-3A6HV-S	9124 017 02282
RAZRm, 44", Enclosed, 3-Bar/4 Fixtures, 277-480V, BW3, Right Angle Connector	RM-44SLBW3-3A4HV-S	9124 017 02283
RAZRm, 44", Enclosed, 3-Bar/3 Fixtures, 277-480V, BW3, Right Angle Connector	RM-44SLBW3-3A3HV-S	9124 017 02284
RAZRm, 44", Enclosed, 3-Bar/8 Fixtures, 120-277V, BW3, Straight Connector	RM-44SLBW3-3S8LV-S	9124 017 02285
RAZRm, 44", Enclosed, 3-Bar/6 Fixtures, 120-277V, BW3, Straight Connector	RM-44SLBW3-3S6LV-S	9124 017 02286
RAZRm, 44", Enclosed, 3-Bar/4 Fixtures, 120-277V, BW3, Straight Connector	RM-44SLBW3-3S4LV-S	9124 017 02287
RAZRm, 44", Enclosed, 3-Bar/3 Fixtures, 120-277V, BW3, Straight Connector	RM-44SLBW3-3S3LV-S	9124 017 02288
RAZRm, 44", Enclosed, 3-Bar/8 Fixtures, 277-480V, BW3, Straight Connector	RM-44SLBW3-3S8HV-S	9124 017 02289
RAZRm, 44", Enclosed, 3-Bar/6 Fixtures, 277-480V, BW3, Straight Connector	RM-44SLBW3-3S6HV-S	9124 017 02290
RAZRm, 44", Enclosed, 3-Bar/4 Fixtures, 277-480V, BW3, Straight Connector	RM-44SLBW3-3S4HV-S	9124 017 02291
RAZRm, 44", Enclosed, 3-Bar/3 Fixtures, 277-480V, BW3, Straight Connector	RM-44SLBW3-3S3HV-S	9124 017 02292



Contact **FLUENCE** @
support@fluence-led.com
www.fluence-led.com/products/razr-series

RAZR Modular

Systems Designed with 3 and 6-Bar Fixtures



SYSTEM ORDERING PART NUMBERS (3-BAR 48")

Description	Regional Commercial Code	Ordering Part Number (12NC)
RAZRm, 48", Enclosed, 3-Bar/ 8 Fixtures, 120-277V, BW3, Right Angle Connector	RM-48SLBW3-3A8LV-S	9124 017 02293
RAZRm, 48", Enclosed, 3-Bar/6 Fixtures, 120-277V, BW3, Right Angle Connector	RM-48SLBW3-3A6LV-S	9124 017 02294
RAZRm, 48", Enclosed, 3-Bar/4 Fixtures, 120-277V, BW3, Right Angle Connector	RM-48SLBW3-3A4LV-S	9124 017 02295
RAZRm, 48", Enclosed, 3-Bar/3 Fixtures, 120-277V, BW3, Right Angle Connector	RM-48SLBW3-3A3LV-S	9124 017 02296
RAZRm, 48", Enclosed, 3-Bar/8 Fixtures, 277-480V, BW3, Right Angle Connector	RM-48SLBW3-3A8HV-S	9124 017 02297
RAZRm, 48", Enclosed, 3-Bar/6 Fixtures, 277-480V, BW3, Right Angle Connector	RM-48SLBW3-3A6HV-S	9124 017 02298
RAZRm, 48", Enclosed, 3-Bar/4 Fixtures, 277-480V, BW3, Right Angle Connector	RM-48SLBW3-3A4HV-S	9124 017 02299
RAZRm, 48", Enclosed, 3-Bar/3 Fixtures, 277-480V, BW3, Right Angle Connector	RM-48SLBW3-3A3HV-S	9124 017 02301
RAZRm, 48", Enclosed, 3-Bar/8 Fixtures, 120-277V, BW3, Straight Connector	RM-48SLBW3-3S8LV-S	9124 017 02302
RAZRm, 48", Enclosed, 3-Bar/6 Fixtures, 120-277V, BW3, Straight Connector	RM-48SLBW3-3S6LV-S	9124 017 02303
RAZRm, 48", Enclosed, 3-Bar/4 Fixtures, 120-277V, BW3, Straight Connector	RM-48SLBW3-3S4LV-S	9124 017 02304
RAZRm, 48", Enclosed, 3-Bar/3 Fixtures, 120-277V, BW3, Straight Connector	RM-48SLBW3-3S3LV-S	9124 017 02305
RAZRm, 48", Enclosed, 3-Bar/8 Fixtures, 277-480V, BW3, Straight Connector	RM-48SLBW3-3S8HV-S	9124 017 02306
RAZRm, 48", Enclosed, 3-Bar/6 Fixtures, 277-480V, BW3, Straight Connector	RM-48SLBW3-3S6HV-S	9124 017 02307
RAZRm, 48", Enclosed, 3-Bar/4 Fixtures, 277-480V, BW3, Straight Connector	RM-48SLBW3-3S4HV-S	9124 017 02308
RAZRm, 48", Enclosed, 3-Bar/3 Fixtures, 277-480V, BW3, Straight Connector	RM-48SLBW3-3S3HV-S	9124 017 02309
RAZRm, 48", Enclosed, 3-Bar/ 8 Fixtures, 120-277V, BW4, Right Angle Connector	RM-48SLBW4-3A8LV-S	9124 017 02310
RAZRm, 48", Enclosed, 3-Bar/6 Fixtures, 120-277V, BW4, Right Angle Connector	RM-48SLBW4-3A6LV-S	9124 017 02311
RAZRm, 48", Enclosed, 3-Bar/4 Fixtures, 120-277V, BW4, Right Angle Connector	RM-48SLBW4-3A4LV-S	9124 017 02312
RAZRm, 48", Enclosed, 3-Bar/3 Fixtures, 120-277V, BW4, Right Angle Connector	RM-48SLBW4-3A3LV-S	9124 017 02313
RAZRm, 48", Enclosed, 3-Bar/8 Fixtures, 277-480V, BW4, Right Angle Connector	RM-48SLBW4-3A8HV-S	9124 017 02314
RAZRm, 48", Enclosed, 3-Bar/6 Fixtures, 277-480V, BW4, Right Angle Connector	RM-48SLBW4-3A6HV-S	9124 017 02315
RAZRm, 48", Enclosed, 3-Bar/4 Fixtures, 277-480V, BW4, Right Angle Connector	RM-48SLBW4-3A4HV-S	9124 017 02316
RAZRm, 48", Enclosed, 3-Bar/3 Fixtures, 277-480V, BW4, Right Angle Connector	RM-48SLBW4-3A3HV-S	9124 017 02317
RAZRm, 48", Enclosed, 3-Bar/8 Fixtures, 120-277V, BW4, Straight Connector	RM-48SLBW4-3S8LV-S	9124 017 02318
RAZRm, 48", Enclosed, 3-Bar/6 Fixtures, 120-277V, BW4, Straight Connector	RM-48SLBW4-3S6LV-S	9124 017 02319
RAZRm, 48", Enclosed, 3-Bar/4 Fixtures, 120-277V, BW4, Straight Connector	RM-48SLBW4-3S4LV-S	9124 017 02320
RAZRm, 48", Enclosed, 3-Bar/3 Fixtures, 120-277V, BW4, Straight Connector	RM-48SLBW4-3S3LV-S	9124 017 02321
RAZRm, 48", Enclosed, 3-Bar/8 Fixtures, 277-480V, BW4, Straight Connector	RM-48SLBW4-3S8HV-S	9124 017 02322
RAZRm, 48", Enclosed, 3-Bar/6 Fixtures, 277-480V, BW4, Straight Connector	RM-48SLBW4-3S6HV-S	9124 017 02323
RAZRm, 48", Enclosed, 3-Bar/4 Fixtures, 277-480V, BW4, Straight Connector	RM-48SLBW4-3S4HV-S	9124 017 02324
RAZRm, 48", Enclosed, 3-Bar/3 Fixtures, 277-480V, BW4, Straight Connector	RM-48SLBW4-3S3HV-S	9124 017 02325

SYSTEM ORDERING PART NUMBERS (6-BAR 48")



Description	Regional Commercial Code	Ordering Part Number (12NC)
RAZRm, High Output, 48", Enclosed, 6-Bar/2 Fixtures, 120-277V, BW3, Right Angle Connector	RM-48SLBW3-6A2LV-S	9124 017 02374
RAZRm, High Output, 48", Enclosed, 6-Bar/1 Fixture, 120-277V, BW3, Right Angle Connector	RM-48SLBW3-6A1LV-S	9124 017 02375
RAZRm, High Output, 48", Enclosed, 6-Bar/2 Fixtures, 120-277V, BW3, Straight Connector	RM-48SLBW3-6S2LV-S	9124 017 02376
RAZRm, High Output, 48", Enclosed, 6-Bar/1 Fixture, 120-277V, BW3, Straight Connector	RM-48SLBW3-6S1LV-S	9124 017 02377
RAZRm, High Output, 48", Enclosed, 6-Bar/2 Fixtures, 277-480V, BW3, Right Angle Connector	RM-48SLBW3-6A2HV-S	9124 017 02378
RAZRm, High Output, 48", Enclosed, 6-Bar/1 Fixture, 277-480V, BW3, Right Angle Connector	RM-48SLBW3-6A1HV-S	9124 017 02379
RAZRm, High Output, 48", Enclosed, 6-Bar/2 Fixtures, 277-480V, BW3, Straight Connector	RM-48SLBW3-6S2HV-S	9124 017 02380
RAZRm, High Output, 48", Enclosed, 6-Bar/1 Fixture, 277-480V, BW3, Straight Connector	RM-48SLBW3-6S1HV-S	9124 017 02381
RAZRm, High Output, 48", Enclosed, 6-Bar/2 Fixtures, 120-277V, BW4, Right Angle Connector	RM-48SLBW4-6A2LV-S	9124 017 02382
RAZRm, High Output, 48", Enclosed, 6-Bar/1 Fixture, 120-277V, BW4, Right Angle Connector	RM-48SLBW4-6A1LV-S	9124 017 02383
RAZRm, High Output, 48", Enclosed, 6-Bar/2 Fixtures, 120-277V, BW4, Straight Connector	RM-48SLBW4-6S2LV-S	9124 017 02384
RAZRm, High Output, 48", Enclosed, 6-Bar/1 Fixture, 120-277V, BW4, Straight Connector	RM-48SLBW4-6S1LV-S	9124 017 02385
RAZRm, High Output, 48", Enclosed, 6-Bar/2 Fixtures, 277-480V, BW4, Right Angle Connector	RM-48SLBW4-6A2HV-S	9124 017 02386
RAZRm, High Output, 48", Enclosed, 6-Bar/1 Fixture, 277-480V, BW4, Right Angle Connector	RM-48SLBW4-6A1HV-S	9124 017 02387
RAZRm, High Output, 48", Enclosed, 6-Bar/2 Fixtures, 277-480V, BW4, Straight Connector	RM-48SLBW4-6S2HV-S	9124 017 02388
RAZRm, High Output, 48", Enclosed, 6-Bar/1 Fixture, 277-480V, BW4, Straight Connector	RM-48SLBW4-6S1HV-S	9124 017 02389





Contact **FLUENCE** support@fluence-led.com
www.fluence-led.com/products/razr-series

2'X4' 3-BAR RACK FIXTURE DIMENSIONS

WITH RIGHT ANGLE DC SPLITTER CABLE
(HORIZONTAL ARRAY LAYOUT)

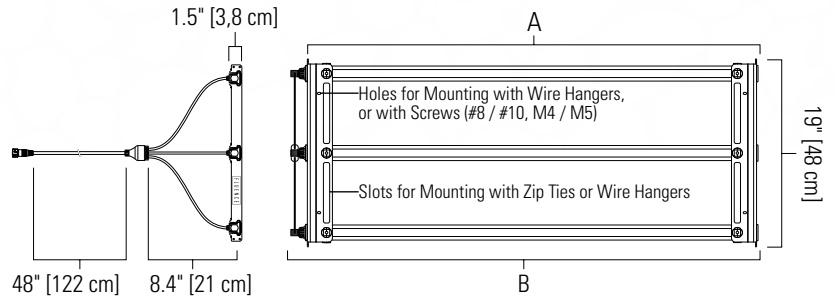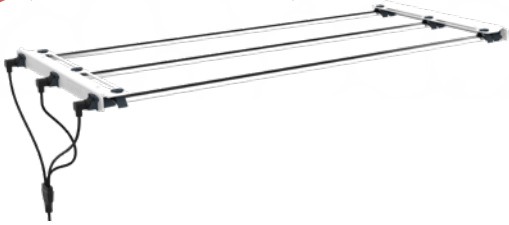


WITH STRAIGHT DC SPLITTER CABLE
(VERTICAL ARRAY LAYOUT)

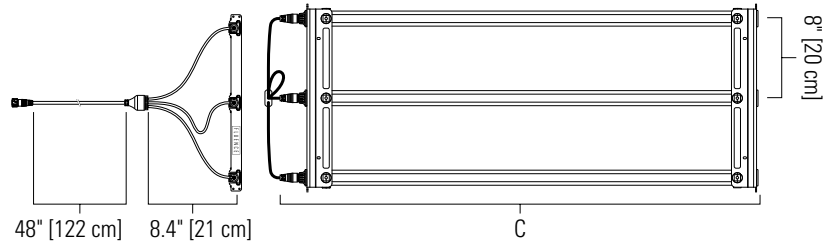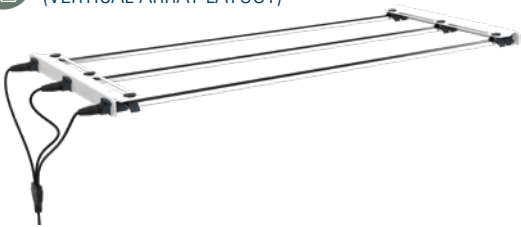


4'X4' 6-BAR RACK FIXTURE DIMENSIONS

WITH RIGHT ANGLE DC SPLITTER CABLE
(HORIZONTAL ARRAY LAYOUT)

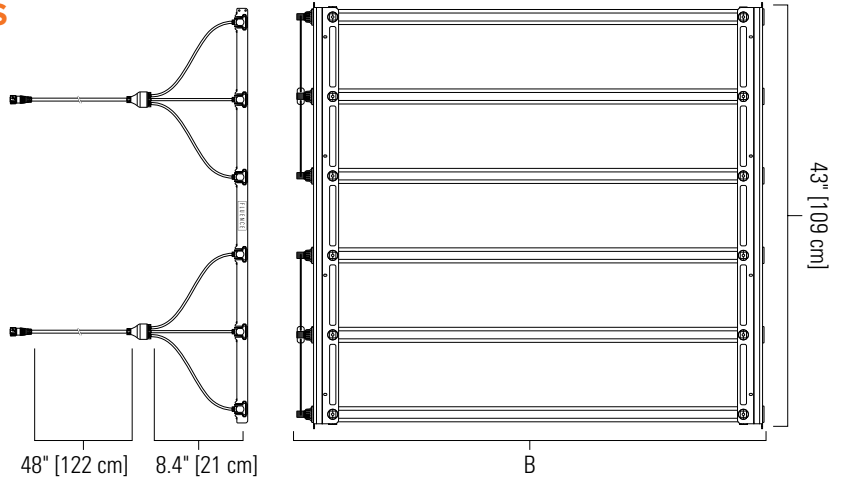

WITH STRAIGHT DC SPLITTER CABLE
(VERTICAL ARRAY LAYOUT)

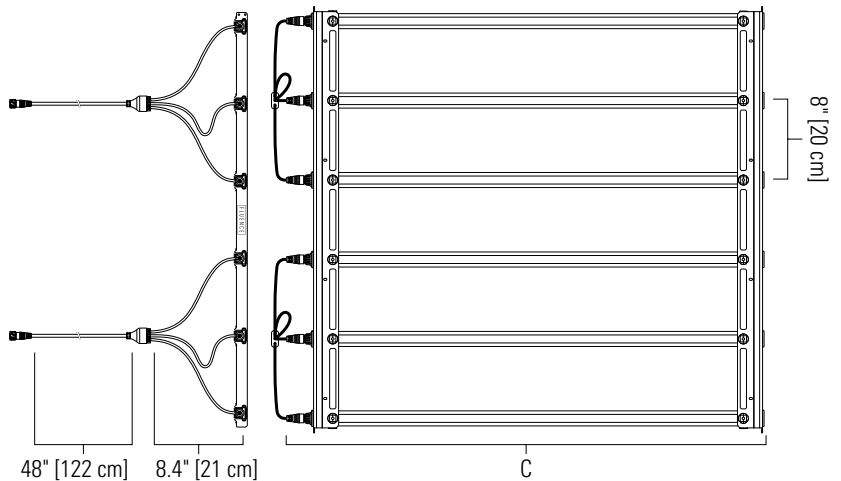

Configuration	Dimension A	Dimension B	Dimension C
RM-44-SL	42.4" [108 cm]	43.8" [111 cm]	44.6" [113 cm]
RM-48-SL	45.4" [116 cm]	46.9" [119 cm]	47.6" [121 cm]


RAZR Modular

Systems Designed with 3 and 6-Bar Fixtures




FIXTURE HANGERS

Description	Length	QTY per Fixtures	Regional Commercial Code	Ordering PN 12NC Single Pack (-S)	Figure
Fixture Wire Hanger, Short - Baker's Rack	51 mm [2"]	1 Kit (4 pcs)	MR-RM-SH-XX	9124 017 02106	A
Fixture Wire Hanger, Medium - PIPP Rack	102 mm [4"]	1 Kit (4 pcs)	MR-RM-MH-XX	9124 017 02107	B
Fixture Wire Hanger, Long - Pallet Rack	191 mm [7.5"]	1 Kit (4 pcs)	MR-RM-LH-XX	9124 017 02108	C

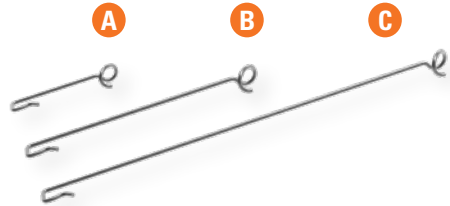

ACCESSORIES FOR POWER SUPPLY


Power Supply Mounting Hardware	Used with Power Supply	Regional Commercial Code	Ordering PN 12NC Single Pack (-S)	Ordering PN 12NC Bulk Pack (-B)	Bulk Pack Carton Quantity	Figure
PSU 292 W Power Supply Surface Mount Kit	PxMG-V3B-320-xxx	MS-PS-MB-3V	9124 016 56290	9124 016 56012	10 Kits	A
PSU LVG 584 W Power Supply Surface Mount Kit	PLMG-V3A-600-xxx	MS-PS-MB-LV	9124 016 56292	9124 016 56011	10 Kits	B
PSU HVG 584 W Power Supply Surface Mount Kit	PHxG-V2C-600-xxx	MS-PS-MB-HV	9124 016 56291	9124 016 56284	10 Kits	C

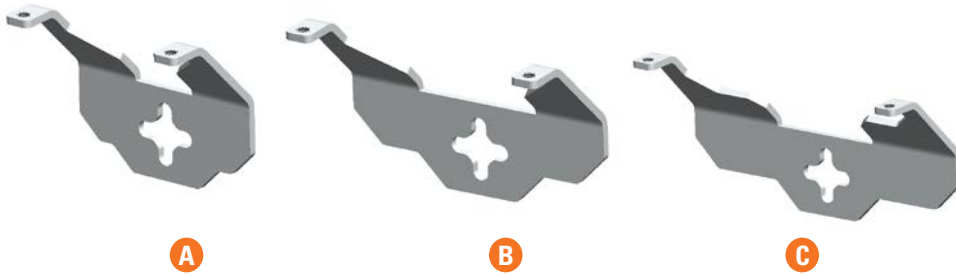

POWER SUPPLY DIMENSIONS AND WEIGHT

Power Supply	Regional Commercial Code	Length	Width	Height	Weight
120-277V AC PSU 365/438/511/584 W DC	PLMG-V3A-600-xxx	12.9" [32,9 cm]	5.3" [13,4 cm]	2.6" [6,7 cm]	8.1 lb [3,7 kg]
277-480V AC PSU 365/438/511/584 W DC	PHMG-V2C-600-xxx	10" [25,4 cm]	6.4" [16,3 cm]	2.4" [6,3 cm]	7.5 lb [3,4 kg]
120-277 V AC PSU 146/219/292 W DC	PLMG-V3B-320-xxx	11.3" [28,8 cm]	4.3" [10,9 cm]	2.9" [7,3 cm]	5.8 lb [2,6 kg]
277-480V AC PSU 146/219/292 W DC	PHMG-V3B-320-xxx	11.3" [28,8 cm]	4.3" [10,9 cm]	2.9" [7,3 cm]	5.8 lb [2,6 kg]

POWER SUPPLY

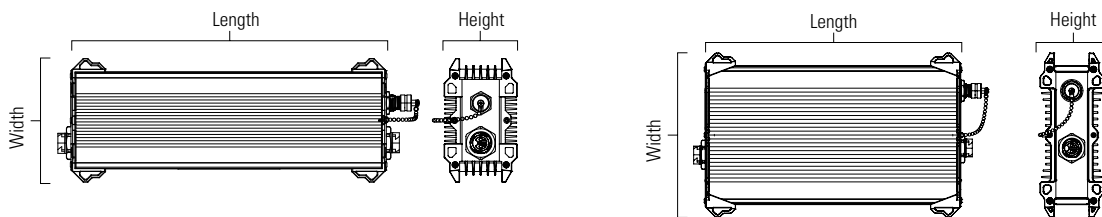

Contact **FLUENCE**
support@fluence-led.com
www.fluence-led.com/products/razr-series

RAZR Modular

Systems Designed with 3 and 6-Bar Fixtures





AC Power Cable - AMERICAS (Power Supply to AC Line)	Quantity per Power Supply	Regional Commercial Code	Ordering PN 12NC Single Pack (S)	Ordering PN 12NC Bulk Pack (B)	Bulk Pack Carton Quantity
6-FT (1.83 m) AC Cable, NEMA 5-15P Plug, M19 Push Lock, Max 125 V AC	1 Pc	CAA-XXU3P9FN5P1.8	9124 017 01611	9124 016 88454	10 Pcs
6-FT (1.83 m) AC Cable, NEMA 6-15P Plug, M19 Push Lock, Max 250 V AC	1 Pc	CAA-XXU3P9FN6P1.8	9124 017 01613	9124 016 88456	10 Pcs
6-FT (1.83 m) AC Cable, NEMA L7-15P Plug, M19 Push Lock, Max 277 V AC	1 Pc	CAA-XXU3P9FL7P1.8	9124 017 01625	9124 016 55898	10 Pcs
6-FT (1.83 m) AC Cable, Pigtail, M19 Push Lock, Max 480 V AC	1 Pc	CAA-XXU3P9FL3X1.8	9124 017 01624	9124 016 55875	10 Pcs
15-FT (4.57 m) AC Cable, NEMA 5-15P Plug, M19 Push Lock, Max 125 V AC	1 Pc	CAA-XXU3P9FN5P4.6	9124 017 01612	9124 016 88455	5 Pcs
15-FT (4.57 m) AC Cable, NEMA 6-15P Plug, M19 Push Lock, Max 250 V AC	1 Pc	CAA-XXU3P9FN6P4.6	9124 017 01614	9124 016 88457	5 Pcs
15-FT (4.57 m) AC Cable, NEMA L7-15P Plug, M19 Push Lock, Max 277 V AC	1 Pc	CAA-XXU3P9FL7P4.6	9124 017 01626	9124 016 55899	5 Pcs
15-FT (4.57 m) AC Cable, Pigtail, M19 Push Lock, Max 480 V AC	1 Pc	CAA-XXU3P9FL3X4.6	9124 017 01610	9124 016 88461	5 Pcs
Wieland AC Connector Adapter for Power Supply, STW PVC, M19 Push Lock, 18-IN (0.46 m), Wieland Part #: 96.032.0053.1 (Male)	1 Pc	AAA-XXU3P9FWGM0.5	9124 016 56089	9124 016 56090	20 Pcs

DC Dimming Signal Cable - AMERICAS (Power Supply to Dimming Control)	Quantity per Power Supply	Regional Commercial Code	Ordering PN 12NC Single Pack (S)	Ordering PN 12NC Bulk Pack (B)	Bulk Pack Carton Quantity
11-IN (0.28 m) Dimming Signal Cable, Pigtail, M12 Connector	1 Pc	CCA-XXU3T2FL3X0.3	9124 017 01621	9124 016 55902	10 Pcs
5-FT (1.52 m) Dimming Signal Cable, Pigtail, M12 Connector	1 Pc	CCA-XXU3T2FL3X1.5	9124 017 01622	9124 016 55881	10 Pcs

AC Power Cable - INTERNATIONAL (Power Supply to AC Line)	Quantity per Power Supply	Regional Commercial Code	Ordering PN 12NC Single Pack (S)	Ordering PN 12NC Bulk Pack (B)	Bulk Pack Carton Quantity
1,83 m (6 FT) AC Cable, VDE, Schuko Type F7 Plug, M19 Push Lock, 230 V AC	1 Pc	CAE-XXV3P9FF7P1.8	9124 017 01628	9124 016 55901	10 Pcs
1,83 m (6 FT) AC Cable, VDE, Pigtail, M19 Push Lock (Not for CE Countries)	1 Pc	CAR-XXV3P9FL3X1.8	9124 017 01616	9124 016 88464	10 Pcs
4,57 m (15 FT) AC Cable, VDE, Schuko Type F7 Plug, M19 Push Lock, 230 V AC	1 Pc	CAE-XXV3P9FF7P4.6	9124 017 01615	9124 016 88463	5 Pcs
4,57 m (15 FT) AC Cable, VDE, Pigtail, M19 Push Lock (Not for CE Countries)	1 Pc	CAR-XXV3P9FL3X4.6	9124 017 01617	9124 016 88465	5 Pcs
70 cm (27,6 IN) AC Cable, Dca, Pigtail, M19 Push Lock (400V CE Application)	1 Pc	CAE-XXD3P9FL3X0.7	9124 017 01627	9124 016 55887	10 Pcs
80 cm (31,5 IN) AC Cable, Dca, Pigtail (Use with Adapter Cable) Wieland Connector Part #: 20i30F B2 ZR1S H GN02 (Female)	1 Pc	CAE-XXD3WGF3X0.8	9124 016 56106	9124 016 56107	10 Pcs
Wieland AC Connector Adapter for Power Supply, Dca Cable, M19 Push Lock, 20 cm (8 IN), Wieland Part #: RST20i3F S2 ZR1SVH GN0 (Male)	1 Pc	AAE-XXD3P9FWGM0.2	9124 017 01609	9124 016 88466	10 Pcs
1,83 m (6 FT) AC Cable, VDE, SAA 3-Prong Plug, M19 Push Lock, Max 250 V AC (Australia and New Zealand)	1 Pc	CAZ-XXS3P9FTIP1.8	9124 017 01618	9124 016 88467	10 Pcs

DC Dimming Signal Cable - INTERNATIONAL (Power Supply to Dimming Control)	Quantity per Power Supply	Regional Commercial Code	Ordering PN 12NC Single Pack (S)	Ordering PN 12NC Bulk Pack (B)	Bulk Pack Carton Quantity
80 cm (31,5 IN) Dimming Signal Cable, Cca, Pigtail, M12 Connector	1 Pc	CCE-XXC3T2FL3X0.8	9124 017 01623	9124 016 55883	10 Pcs



Contact **FLUENCE** 
 support@fluence-led.com 
www.fluence-led.com/products/razr-series 